



***BEST  
BENNER***

La Casa De Los **Plafones.**


## **FLOORS**

LVT Vinyl Staff

VCT Vinyl Staff

# LVT VINYL STAFF

## Dream wood / High wood

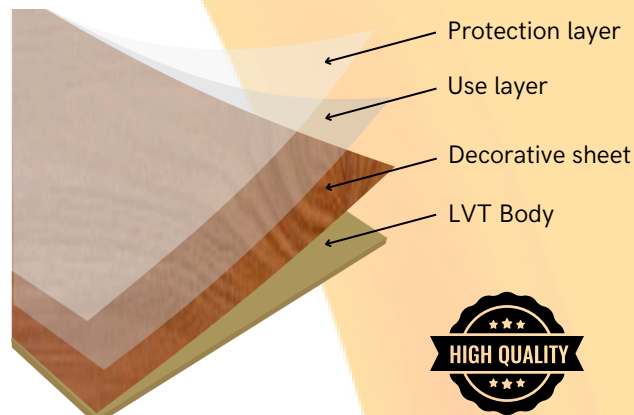

Easy Installation



Resistant




Light Weight



Maintenance easy


Description	Duela Dream Wood	Duela High Wood
Size	30.48 x 91.44 cm (12" x 36")	
Thickness	3.0 mm	
Weight	5.09 Kg / m2 14.20 kg / box	
Packing	10 pieces 2.79 m2 / box	
Wear layer	0.30 mm	0.50 mm
Adhesive	Contact	
Durability	5 - 10 - 15 años según capa protectora, espesor y uso.	

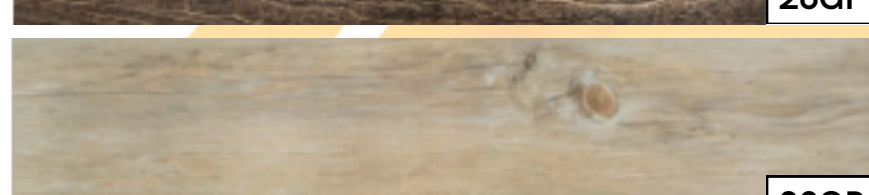

- The material must be placed on a flat, uniform and level surface, without irregularities, free of dust, grease and dirt. The maximum humidity of the installation surface is 3%.
- The thickness and protective layer depends on the needs of the client.
- Stave with engraving.
- Designed for heavy traffic such as gyms, cinemas, offices, stores, etc.
- It should not be polished.
- No solvent should be applied.

# LVT VINYL STAFF

## Exotic wood

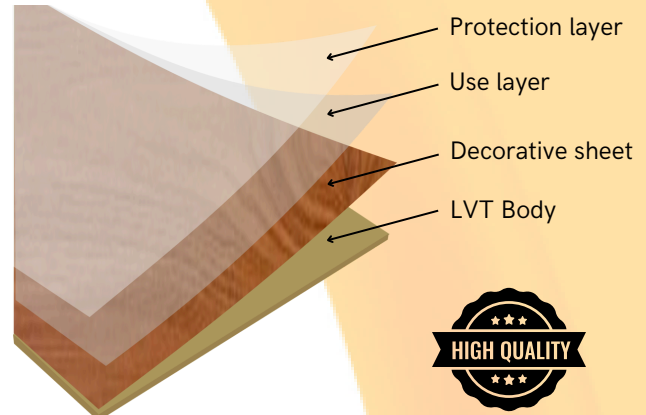

Easy Installation



Resistant




Light Weight



Maintenance easy

★ means in stock


Description	Duela Exotic Wood
Size	15.24 x 91.44 cm (6"x36")
Thickness	2.0 mm
Weight	3.41 kg/m <sup>2</sup> 11.40 kg x caja
Packing	24 piezas 3.34 m <sup>2</sup> x caja
Wear layer	0.20 mm
Adhesive	Contact
Durability	5 - 10 - 15 años según capa protectora, espesor y uso.

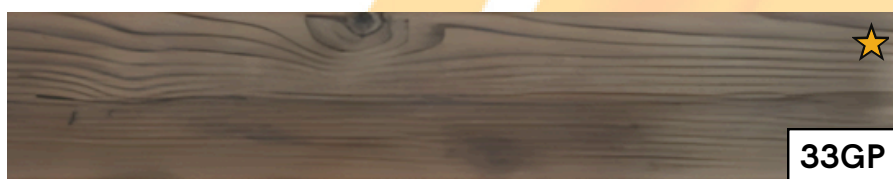

- The material must be placed on a flat, uniform and level surface, without irregularities, free of dust, grease and dirt. The maximum humidity of the installation surface is 3%.
- The thickness and protective layer depends on the needs of the client.
- Duela con grabado.
- Diseñada para tráfico pesado como gimnasios, cines, oficinas, tiendas, etc.
- No se debe pulir.
- No se debe aplicar ningún solvente.

# LVT VINYL STAFF

## Style wood

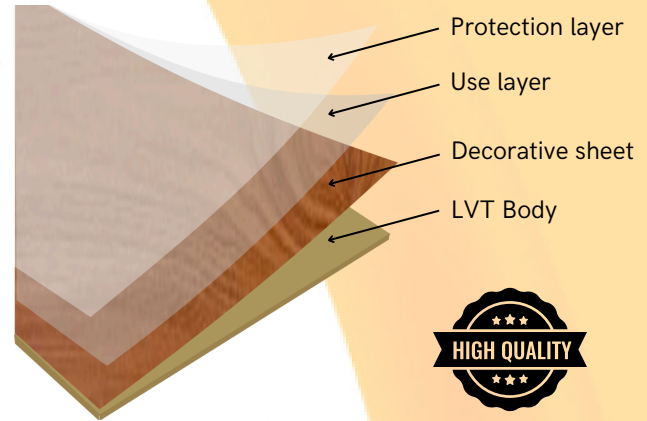

Easy Installation



Resistant



Light Weight




Maintenance easy

Description	Duela Style Wood
Size	15.24 x 91.44 cm (6"x36")
Thickness	1.4 mm
Weight	2.55 kg/m <sup>2</sup> 14.20 kg x caja
Packing	40 piezas 5.57 m <sup>2</sup> x caja
Wear layer	0.15 mm
Adhesive	Contact
Durability	5 - 10 - 15 años según capa protectora, espesor y uso.



- The material must be placed on a flat, uniform and level surface, without irregularities, free of dust, grease and dirt. The maximum humidity of the installation surface is 3%.
- The thickness and protective layer depends on the needs of the client.
- Duela con grabado.
- Diseñada para tráfico pesado como gimnasios, cines, oficinas, tiendas, etc.
- No se debe pulir.
- No se debe aplicar ningún solvente.

# VCT VINYL TILE

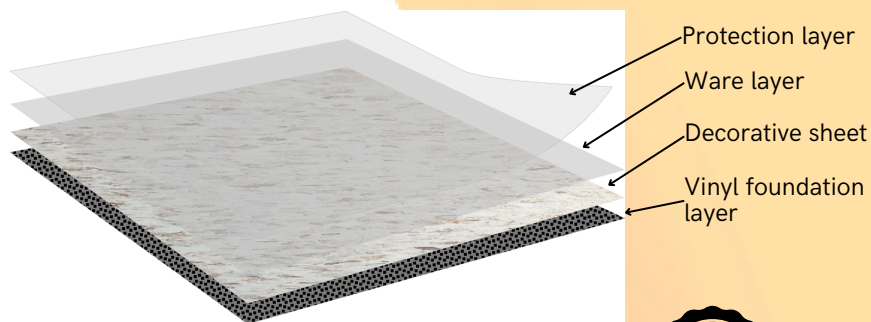

Easy Installation



Resistant



Light Weight



Maintenance easy

Description	Vinyl Tile				
Size	30.48 cm x 30.48 cm (12"x12")			45.72 cm x 45.72 cm (18"x18")	
Thickness	1.3 mm	1.6 mm	3.1 mm	1.6 mm	3.1 mm
Weight	2.72 kg/m <sup>2</sup> 27.2 kg x caja	3.20 kg/m <sup>2</sup> 13.37 kg x caja	6.76 kg/m <sup>2</sup> 28.23 kg x caja	3.20 kg/m <sup>2</sup> 13.37 kg x caja	6.76 kg/m <sup>2</sup> 28.25 kg x caja
Packing	108 piezas 10.03 m <sup>2</sup> x caja	3.20 kg/m <sup>2</sup> 13.37 kg x caja	6.76 kg/m <sup>2</sup> 28.23 kg x caja	20 piezas 4.18 m <sup>2</sup> x caja	20 piezas 4.18 m <sup>2</sup> x caja
Adhesive	Latex				
Model	Alabastro Erernolux Vis Madeiras Mármol Parquet Tradicional	Century Eternolux Onyx Royal Sahara Sólida	Century Eternolux Onyx Royal Royal Colors Royal Plus Sahara Sólida	Carrara	

## Maintenance:


- All you need is water, soap or some liquid floor cleaner.
- It can also be polished, resulting in a new floor appearance.
- It can be installed with special latex glue for tile, also with contact glue \*depending on the humidity of the surface is how the appropriate adhesive is chosen for installation, that is, if there is excess humidity, it is advisable to use latex glue.

## Benefits:




- Easy placement. If any part is damaged, it can be changed without having to lift the entire floor.
- Non-slip and easy maintenance.
- Self-extinguishing.
- Thermal and acoustic insulation.
- Very light materials that adapt to the new lightweight construction standards.

# VCT VINYL TILE

ALABASTER


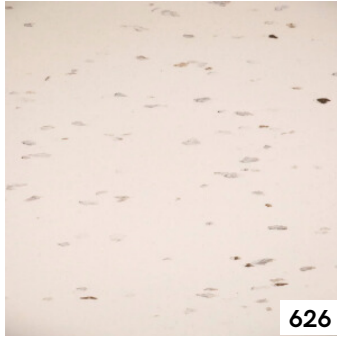


CARRARA

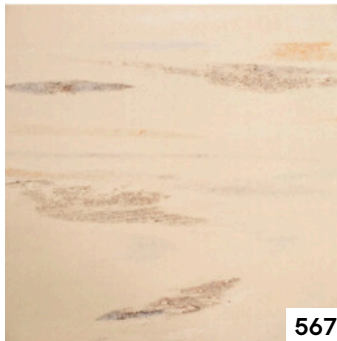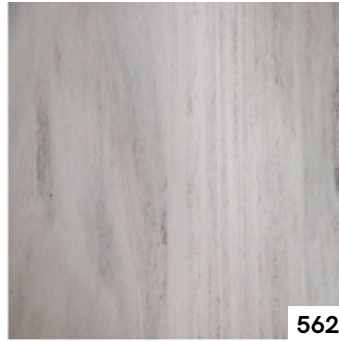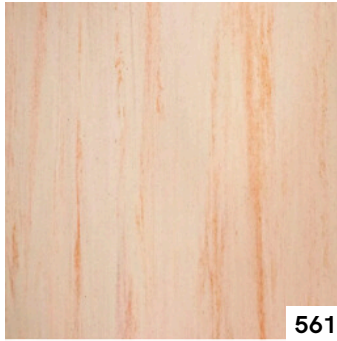

★ means in stock

CENTURY





# VCT VINYL TILE

ROYAL AMBER




★ means in stock



ETERNOLUX




MADEIRAS



MARMOL



ONYX






# VCT VINYL TILE

## PARQUET





## ROYAL



## SAHARA






## SOLIDA








# VCT VINYL TILE

## ROYAL COLOR




★ means in stock


## ROYAL PLUS



## TRADICIONAL



# VCT VINYL TILE

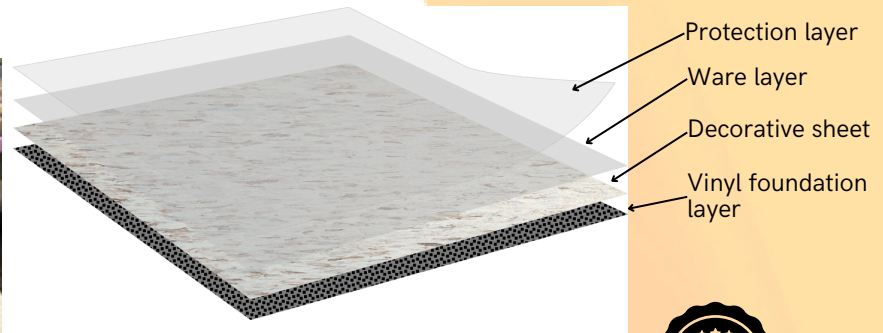

Easy Installation



Resistant



Light Weight




Maintenance easy

Description	Best Regal
Size	30.48 cm x 30.48 cm (12" x 12")
Thickness	3.1 mm
Weight	6.65 kg/m <sup>2</sup> 27.8 kg
Packing	45 pieces 4.18 m <sup>2</sup> / box
Adhesive	Latex



BEST-150602

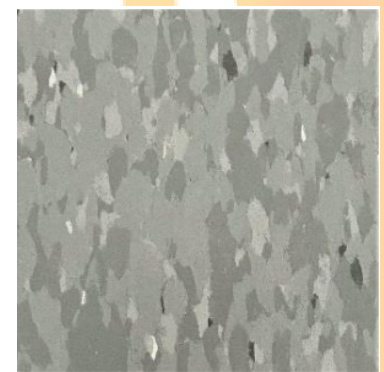


BEST-150612



BEST-150679



BEST-150637

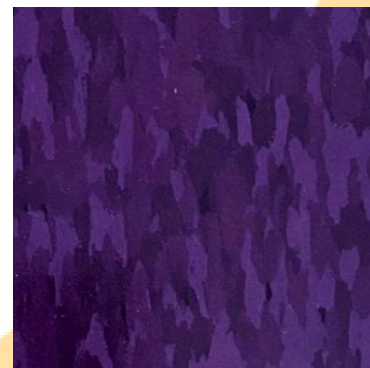

BEST-150644



BEST-150667

## Maintenance:

- All you need is water, soap or some liquid floor cleaner.
- It can also be polished, resulting in a new floor appearance.
- It can be installed with special latex glue for tile, also with contact glue \*depending on the humidity of the surface is how the appropriate adhesive is chosen for installation, that is, if there is excess humidity, it is advisable to use latex glue.

## Benefits:

- Easy placement. If any part is damaged, it can be changed without having to lift the entire floor.
- Non-slip and easy maintenance.
- Self-extinguishing.
- Thermal and acoustic insulation.
- Very light materials that adapt to the new lightweight construction standards.

# VCT VINYL TILE




BEST-150670



BEST-150689



BEST-150688

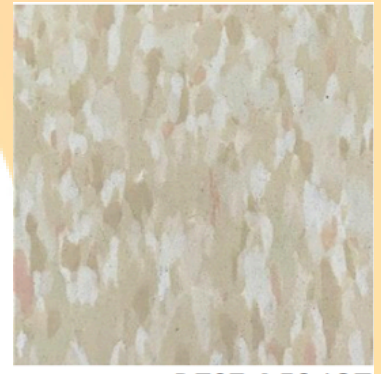

BEST-150627



BEST-150628



BEST-150629




BEST-150631



BEST-150633



BEST-150643

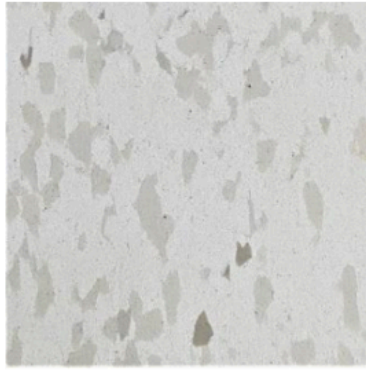


BEST-150641



BEST-150645



BEST-150613

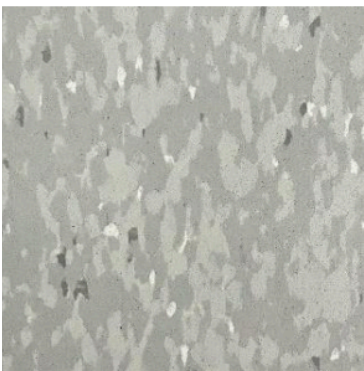

BEST-150622



BEST-150623



BEST-150619